

National Semiconductor is now part of  
Texas Instruments.

Search <http://www.ti.com/> for the latest technical  
information and details on our current products and services.

# DS9638QML

## RS-422 Dual High Speed Differential Line Driver

### General Description

The DS9638 is a Schottky, TTL compatible, dual differential line driver designed specifically to meet the EIA Standard RS-422 specifications. It is designed to provide unipolar differential drive to twisted pair or parallel wire transmission lines. The inputs are TTL compatible. The outputs are similar to totem pole TTL outputs, with active pull-up and pull-down. The device features a short circuit protected active pull-up with low output impedance and is specified to drive 50Ω transmission lines at high speed. The mini-DIP provides high package density.


### Features

- Single 5V supply
- Schottky technology
- TTL and CMOS compatible inputs
- Output short circuit protection
- Input clamp diodes
- Complementary outputs
- Minimum output skew (<1.0 ns typical)
- 50 mA output drive capability for 50Ω transmission lines
- Meets EIA RS-422 specifications
- Propagation delay of less than 10 ns
- "Glitchless" differential output
- Delay time stable with  $V_{CC}$  and temperature variations (<2.0 ns typical) (Figure 3)
- Extended temperature range

### Ordering Table

NS PART NUMBER	SMD PART NUMBER	NS PACKAGE NUMBER	PACKAGE DISCRIPTION
DS9638J/883	5962-8754601PA	J08A	8LD CERAMIC DIP

### Connection Diagram

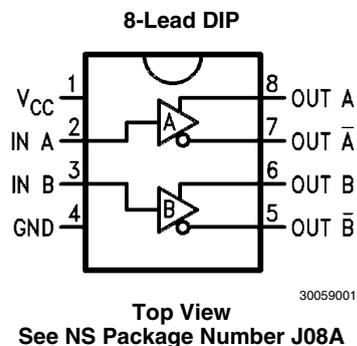

## Absolute Maximum Ratings (Note 1)

Storage Temperature Range	
Ceramic DIP	-65°C to +175°C
Lead Temperature	
Ceramic DIP (Soldering, 60 sec.)	300°C
Maximum Power Dissipation at 25°C (Note 2)	
Cavity Package	1300 mW
$V_{CC}$ Lead Potential to Ground	-5V to 7V
Input Voltage	-0.5V to +7V

## Recommended Operating Conditions

DS9638J/883	Min	Max	Units
Supply Voltage ( $V_{CC}$ )	4.5	5.5	V
Output Current HIGH ( $I_{OH}$ )		-50	mA
Output Current LOW ( $I_{OL}$ )		50	mA
Operating Temperature ( $T_A$ )	-55	125	°C

## Quality Conformance Inspection

MIL-STD-883, Method 5005 - Group A

Subgroup	Description	Temp (°C)
1	Static tests at	+25°C
2	Static tests at	+125°C
3	Static tests at	-55°C
4	Dynamic tests at	+25°C
5	Dynamic tests at	+125°C
6	Dynamic tests at	-55°C
7	Functional tests at	+25°C
8A	Functional tests at	+125°C
8B	Functional tests at	-55°C
9	Switching tests at	+25°C
10	Switching tests at	+125°C
11	Switching tests at	-55°C
12	Setting time at	+25°C
13	Setting time at	+125°C
14	Setting time at	-55°C

## DS9638J/883 Electrical Characteristics

### DC Parameters

Over recommended operating temperature and supply voltage ranges, unless otherwise specified

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub-Groups
$V_{OL}$	Output Voltage Low	$V_{CC} = 4.5V$ , $F_{IOL} = 30mA$ for temp, $F_{IOL} = 35mA$ for room	(Note 3)		0.5	V	1, 2, 3
VFCD	Input Clamped Voltage	$V_{CC} = 4.5V$ , $F_{IFCD} = -18mA$		-1.2		V	1, 2, 3
$V_{OHQVT}$	$V_T$ , $\bar{V}_T$ Terminated Output Voltage	$V_{CC} = 5.5V$ , $R_O = 100 \Omega$		2		V	1, 2, 3
$V_{OH}$	Logical "1" Output Voltage	$V_{CC} = 4.5V$ , $F_{IOH} = -10mA$		2.5		V	1
				2.0			2, 3
$V_{OHQ}$	Logical "1" Output Voltage	$V_{CC} = 4.5V$ , $F_{IOHQ} = -40mA$		2.0		V	1
				1.0			2, 3
$V_{OHQBAL}$	$V_T$ - $\bar{V}_T$ Output Balance	$V_{CC} = 5.5V$ , $R_O = 100 \Omega$		-0.4	0.4	V	1, 2, 3
$I_{IL}$	Logical "0" Input Current	$V_{CC} = 5.5V$ , $F_{VIL} = 0.5V$		-200		$\mu A$	1, 2, 3
$I_{IH}$	Logical "1" Input Current	$V_{CC} = 5.5V$ , $F_{VIH} = 2.7V$			25	$\mu A$	1, 2, 3
$I_{IHQH}$	Logical "1" Input Current	$V_{CC} = 5.5V$ , $F_{VIHQH} = 5.5V$			50	$\mu A$	1, 2, 3
$I_{OS}$	Output Short Circuit Current	$V_{CC} = 5.5V$ , $F_{V_{IOS}} = 0V$		-150	-50	mA	1
				-150	-40		2, 3
$I_{CC}$	Supply Current	$V_{CC} = 5.5V$ , $F_{V_{CCH}} = 5.5V$			65	mA	1
					75		2, 3
$I_{OHC}$	$I_O$ (off) Output Leakage	$V_{CC} = 5.5V$ , $F_{V_{OH}} = 5.5V$			200	$\mu A$	1
$V_{OS}$ , $\bar{V}_{OS}$	Output Offset Voltage		(Note 5)		3	V	1, 2, 3
$V_{OS}$ - $\bar{V}_{OS}$	Output Offset Balance		(Note 4)		.4	V	1, 2, 3
$V_{IH}$	Input High Voltage		(Note 6)	2		V	1, 2, 3
$V_{IL}$	Input Low Voltage		(Note 6)		0.5	V	1, 2, 3
$V_{HB}$	$I_X$ Output Leakage	$V_{CC} = 0.0V$ , $F_{IOHBQI} = 150 \mu A$		5.55		V	1
$I_{CEX}$	Output Leakage Current	$V_{CC} = 0.0V$ , $F_{V_{CEX}} = 5.5V$			150	$\mu A$	2, 3
$I_{CEXQI}$	Output Leakage Current	$V_{CC} = 0.0V$ , $F_{V_{ICEXQ2}} = -0.25V$		-150		$\mu A$	2, 3

### AC Parameters

Over recommended operating temperature and supply voltage ranges, unless otherwise specified

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub-Groups
$t_{PLH}$	Propagation Delay to High Level	$V_{CC} = 5V$ , $R_O = 100 \Omega$ , $C_L = 15_{PF}$			20	nS	9
$t_{PHL}$	Propagation Delay to Low Level	$V_{CC} = 5V$ , $R_O = 100 \Omega$ , $C_L = 15_{PF}$			20	nS	9
$t_F$	Fall Time	$V_{CC} = 5V$ , 90% - 10%			20	nS	9
$t_R$	Rise Time	$V_{CC} = 5V$ , 10% - 90%			20	nS	9

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Electrical Characteristics provide conditions for actual device operation.


**Note 2:** Derate cavity package 8.7 mW/°C above 25°C.

**Note 3:** 35mA is more stringent than 30mA.

**Note 4:** Guaranteed by  $V_T$ - $\bar{V}_T$  test.

**Note 5:** Guaranteed by design.


**Note 6:** Guaranteed by  $V_{OH}$  &  $V_{OL}$  tests.

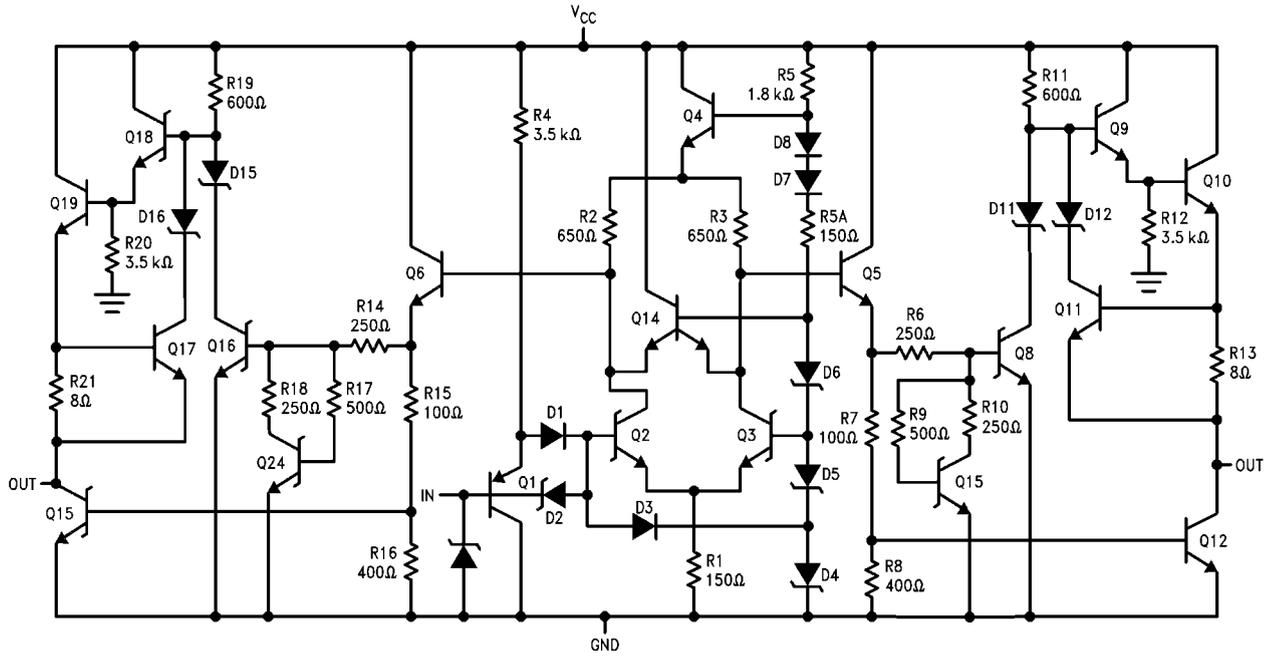

30059002


FIGURE 1. Equivalent Circuit

DC Test Circuit

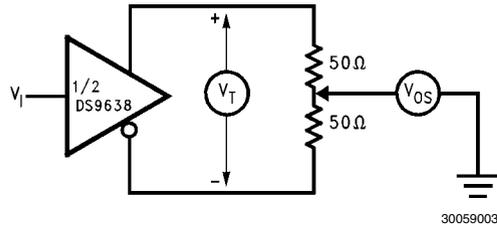


30059003

FIGURE 2. Terminated Output Voltage and Output Balance

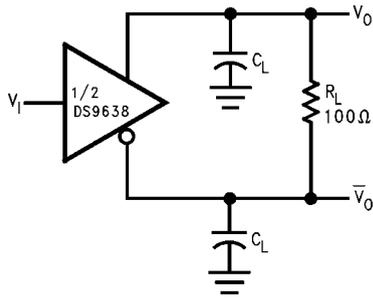

30059004



$C_L$  includes probe and jig capacitance.  
 PRR = 500 kHz,  $t_w = 100$  ns,  
 $t_r \leq 5.0$  ns,  $Z_O = 50\Omega$ .

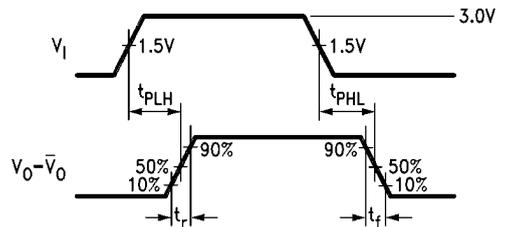

30059005

Note 7: The pulse generator has the following characteristics:

FIGURE 3. AC Test Circuit and Voltage Waveform

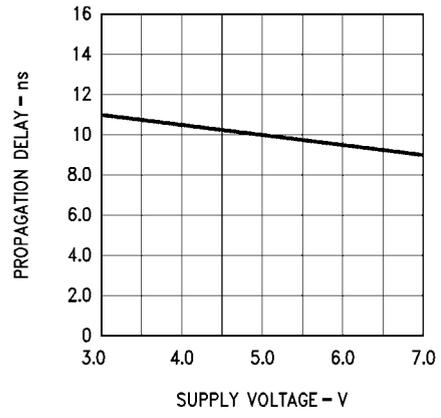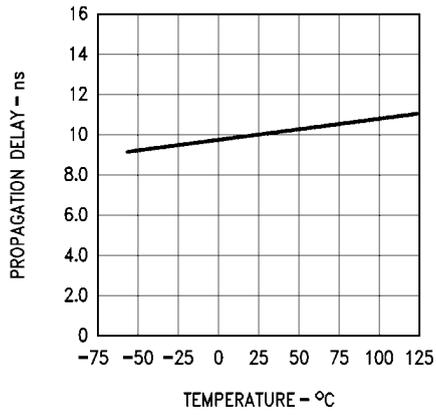


30059006  
**FIGURE 4. Typical Delay Characteristics**

30059007



## Revision History

Date Released	Revision	Section	Originator	Changes
05/27/08	A	New Release, Corporate Format, Change to DC Electrical Section	Bill Petcher	1 MDS data sheet converted into one Corp. data sheet format. Change made to $V_{OH}$ , $V_{OHQ}$ and $I_{OS}$ . MNDS9638-X, Rev. 0AL data sheet will be Archived.

**Physical Dimensions** inches (millimeters) unless otherwise noted

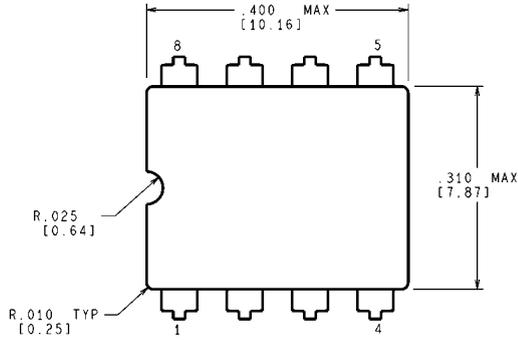

**CONTROLLING DIMENSION IS INCH**  
**VALUES IN [ ] ARE MILLIMETERS**

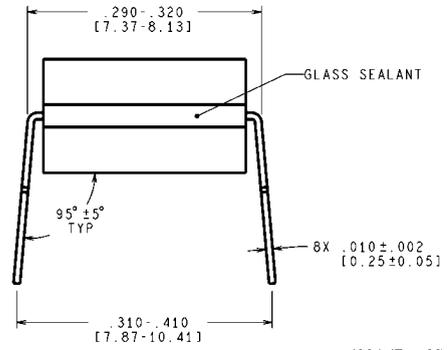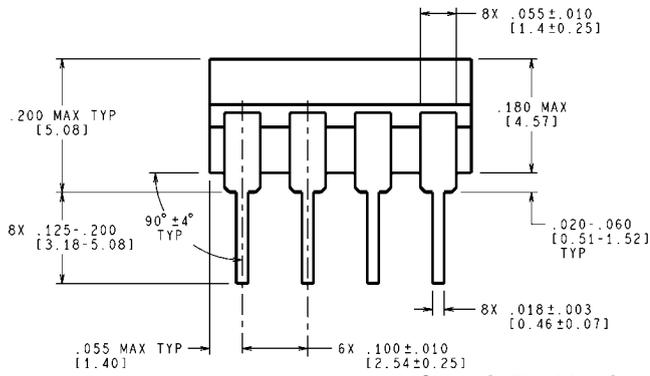

J08A (Rev M)

**Ceramic Dual-In-Line Package (J)**  
**NS Package Number J08A**

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	<a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>	WEBENCH	<a href="http://www.national.com/webench">www.national.com/webench</a>
Audio	<a href="http://www.national.com/audio">www.national.com/audio</a>	Analog University	<a href="http://www.national.com/AU">www.national.com/AU</a>
Clock Conditioners	<a href="http://www.national.com/timing">www.national.com/timing</a>	App Notes	<a href="http://www.national.com/appnotes">www.national.com/appnotes</a>
Data Converters	<a href="http://www.national.com/adc">www.national.com/adc</a>	Distributors	<a href="http://www.national.com/contacts">www.national.com/contacts</a>
Displays	<a href="http://www.national.com/displays">www.national.com/displays</a>	Green Compliance	<a href="http://www.national.com/quality/green">www.national.com/quality/green</a>
Ethernet	<a href="http://www.national.com/ethernet">www.national.com/ethernet</a>	Packaging	<a href="http://www.national.com/packaging">www.national.com/packaging</a>
Interface	<a href="http://www.national.com/interface">www.national.com/interface</a>	Quality and Reliability	<a href="http://www.national.com/quality">www.national.com/quality</a>
LVDS	<a href="http://www.national.com/lvds">www.national.com/lvds</a>	Reference Designs	<a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>
Power Management	<a href="http://www.national.com/power">www.national.com/power</a>	Feedback	<a href="http://www.national.com/feedback">www.national.com/feedback</a>
Switching Regulators	<a href="http://www.national.com/switchers">www.national.com/switchers</a>		
LDOs	<a href="http://www.national.com/ldo">www.national.com/ldo</a>		
LED Lighting	<a href="http://www.national.com/led">www.national.com/led</a>		
PowerWise	<a href="http://www.national.com/powerwise">www.national.com/powerwise</a>		
Serial Digital Interface (SDI)	<a href="http://www.national.com/sdi">www.national.com/sdi</a>		
Temperature Sensors	<a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a>		
Wireless (PLL/VCO)	<a href="http://www.national.com/wireless">www.national.com/wireless</a>		

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2008 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor Americas Technical Support Center**  
 Email: [support@nsc.com](mailto:support@nsc.com)  
 Tel: 1-800-272-9959

**National Semiconductor Europe Technical Support Center**  
 Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
 German Tel: +49 (0) 180 5010 771  
 English Tel: +44 (0) 870 850 4288

**National Semiconductor Asia Pacific Technical Support Center**  
 Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan Technical Support Center**  
 Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)