

**SN54S64, SN54S65,
SN74S64, SN74S65**

4-2-3-2 INPUT AND-OR-INVERT GATES

DECEMBER 1983 — REVISED MARCH 1988



- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers and Flat Packages, and Plastic and Ceramic DIPs
- Dependable Texas Instruments Quality and Reliability

description

These devices contain 4-2-3-2 input AND-OR-INVERT gates. They perform the Boolean function $Y = \overline{ABCD} + EF + GHI + JK$. The 'S64 has totem-pole outputs and the 'S65 has open-collector outputs.


The SN54S64 and the SN54S65 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74S64 and the SN74S65 are characterized for operation from 0°C to 70°C .

logic symbols[†]

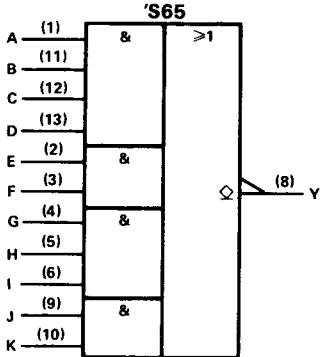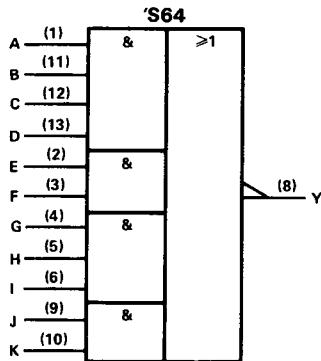


**SN54S64, SN54S65 . . . J OR W PACKAGE
SN74S64, SN74S65 . . . D OR N PACKAGE**

(TOP VIEW)




SN54S64, SN54S65 . . . FK PACKAGE

(TOP VIEW)

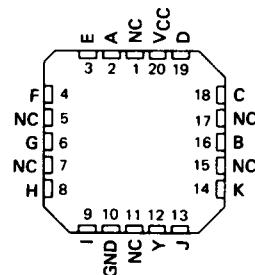

NC - No internal connection

logic diagram (each device) (positive logic)

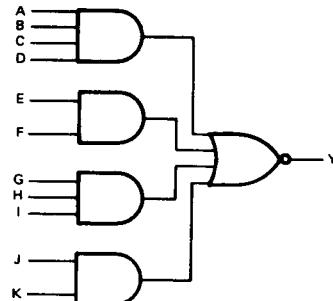


[†]These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for D, J, N, and W packages.

**SN54S64, SN54S65
SN74S64, SN74S65
4-2-3-2 INPUT AND-OR-INVERT GATES**

schematics (each gate)

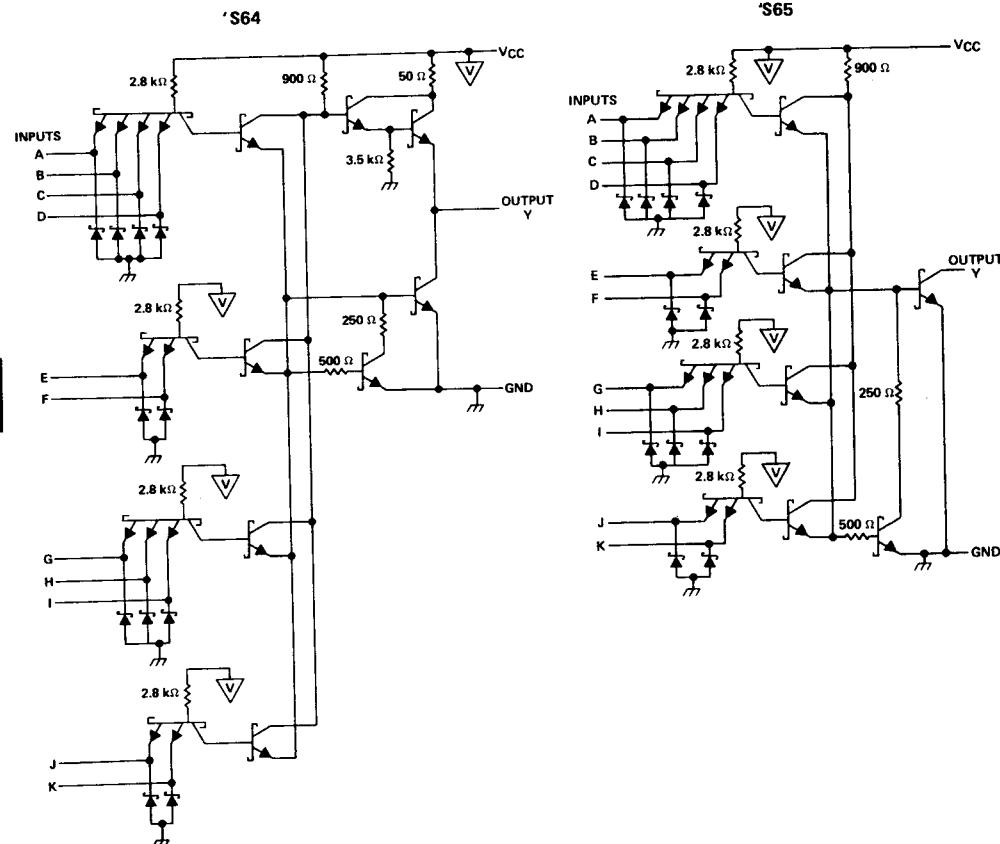

2

TTL Devices

Resistor values shown are nominal and in ohms.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V _{CC} (see Note 1)	7 V
Input voltage	5.5 V
Off-state output voltage, 'S65	7 V
Operating free-air temperature range: SN54'..... SN74'.....	-55°C to 125°C 0°C to 70°C -65°C to 150°C
Storage temperature range	

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

		SN54S64			SN74S64			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage			0.8			0.8	V
I _{OH}	High-level output current			-1			-1	mA
I _{OL}	Low-level output current			20			20	mA
T _A	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS †	SN54S64			SN74S64			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IK}	V _{CC} = MIN, I _I = -18 mA			-1.2			-1.2	V
V _{OH}	V _{CC} = MIN, V _{IL} = 0.8 V, I _{OH} = -1 mA	2.5	3.4		2.7	3.4		V
V _{OL}	V _{CC} = MIN, V _{IH} = 2 V, I _{OL} = 20 mA			0.5			0.5	V
I _I	V _{CC} = MAX, V _I = 5.5 V			1			1	mA
I _{IH}	V _{CC} = MAX, V _I = 2.7 V			50			50	µA
I _{IL}	V _{CC} = MAX, V _I = 0.5 V			-2			-2	mA
I _{OSS}	V _{CC} = MAX	-40		-100	-40		-100	mA
I _{CCH}	V _{CC} = MAX, V _I = 0		7	12.5		7	12.5	mA
I _{CCL}	V _{CC} = MAX, V _I = 4.5 V		8.5	16		8.5	16	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see note 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH}	Any	Y	R _L = 280 Ω, C _L = 15 pF	3.5	5.5		ns
t _{PHL}			R _L = 280 Ω, C _L = 15 pF	3.5	5.5		ns
t _{PLH}			R _L = 280 Ω, C _L = 50 pF	5			ns
t _{PHL}			R _L = 280 Ω, C _L = 50 pF	5.5			ns

NOTE 2: Load circuits and voltage waveforms are shown in Section 1.

SN54S64, SN74S64

4-2-3-2 INPUT AND-OR-INVERT GATES

recommended operating conditions

		SN54S65			SN74S65			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage			0.8			0.8	V
V _{OH}	High-level output voltage			5.5			5.5	V
I _{OL}	Low-level output current			20			20	mA
T _A	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]	SN54S65			SN74S65			UNIT
		MIN	TYP [‡]	MAX	MIN	TYP [‡]	MAX	
V _{IK}	V _{CC} = MIN, I _I = -18 mA			1.2			1.2	V
I _{OH}	V _{CC} = MIN, V _{IL} = 0.8 V, V _{OH} = 5.5 V						0.25	
	V _{CC} = MIN, V _{IL} = 0.7 V, V _{OH} = 5.5 V			0.25				mA
V _{OL}	V _{CC} = MIN, V _{IH} = 2 V, I _{OL} = 20 mA		0.2	0.4		0.2	0.4	V
	V _{CC} = MAX, V _I = 5.5 V				1		1	
I _I	V _{CC} = MAX, V _I = 2.7 V			50			50	μA
I _{IH}	V _{CC} = MAX, V _I = 0.5 V			-2			-2	mA
I _{IL}	V _{CC} = MAX, V _I = 0		6	11		6	11	mA
I _{CCH}	V _{CC} = MAX, V _I = 4.5 V		8.5	16		8.5	16	mA
I _{CLL}								

[†]For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

[‡]All typical values are at V_{CC} = 5 V, T_A = 25°C.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see note 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN TYP MAX			UNIT
				2	5	7.5	
t _{PLH}	Any	Y	R _L = 280 Ω, C _L = 15 pF	2	5.5	8.5	ns
t _{PHL}			R _L = 280 Ω, C _L = 50 pF	8			ns
t _{PLH}	Any	Y	R _L = 280 Ω, C _L = 50 pF	6.5			ns
t _{PHL}							

NOTE 2: Load circuits and voltage waveforms are shown in Section 1.